

OMA-GUARDIT

Rugged Automatic Alarm Dialer



\$895
Basic Unit

- ✓ Monitors Four Analog or Digital Inputs, Individually Selectable
- ✓ Calls Up to Eight Phone Numbers on Alarm Condition
- ✓ Digitally Records Alarm Messages up to 12 Seconds Long Each
- ✓ Built-in Surge Protection
- ✓ Wall Mount or Panel Mount
- ✓ Rugged Steel Construction


The OMA-GUARDIT automatic alarm dialer monitors 4 input channels. Each channel can be configured for an analog or digital signal input. The system utilizes the public telephone network as a basic medium for transmission of alarm messages and status calls. It is field programmable by the user at the system's control panel via a standard touch tone phone handset.

Automatic Alarm Reporting

Upon detection of an alarm condition, OMA-GUARDIT automatically calls a list of up to 8 pre-programmed phone numbers over the standard dial-up telephone network, calling until it gets an acknowledgement. When a connection is made, the system reports the station identity and the specific alarm condition in the form of a digitally pre-recorded voice message. In addition to standard phones in office, plant, or home, the alarm calling sequence can also include calls to pagers, cellular phones, and voice mail.

Local Alarm Relay Output

The OMA-GUARDIT provides a transistor output for TTL or relay drive (500 mA 24 VDC max) activated during unacknowledged

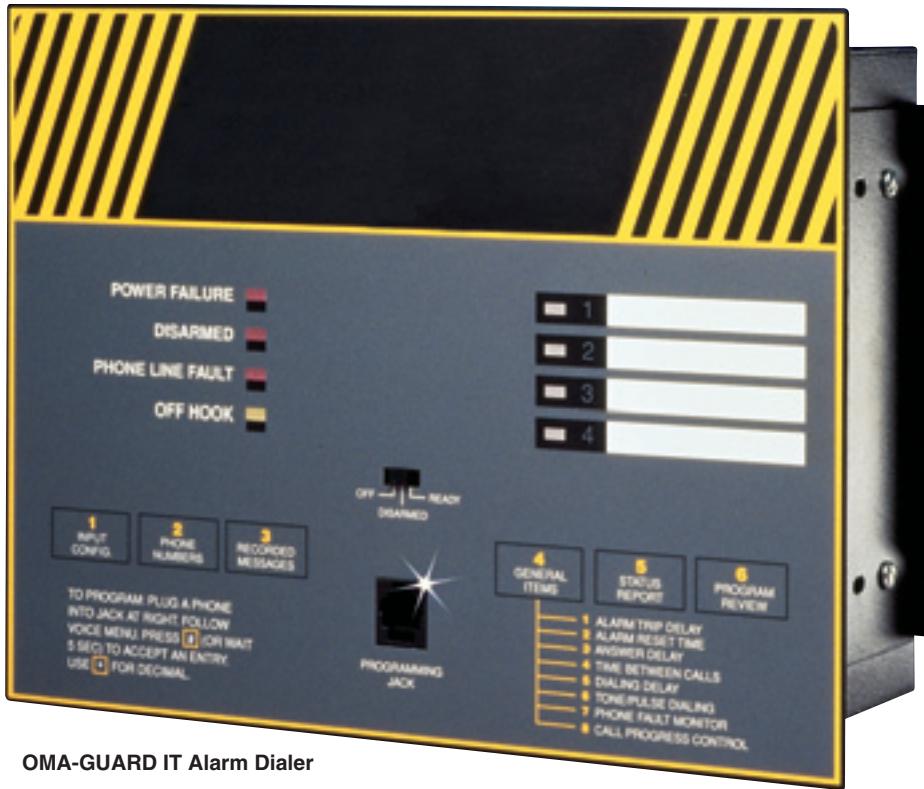

OMA-GUARD IT Alarm Dialer

alarm. This output can be used to activate a local alarm buzzer or light, can be used to remove power to machinery when used with a normally closed relay or activate/de-activate any device locally when an alarm condition occurs.

Alarm Acknowledgment

An alarm is acknowledged simply by pressing a button on the called phone. When acknowledging an alarm, a built-in microphone permits the caller to listen for background sounds at the site. The user can also call the system from any remote phone for a status report of all points being monitored.

Voice Messaging

The voice transmission consists of a station identification together with an alarm message giving details on the fault. The station identification and alarm messages are digitally recorded by the user. By using electronic voice reporting technology, OMA-GUARDIT eliminates the need for often unreliable audio tape autodialers.

Set-up and Programming

System set-up, voice recording, and programming is accomplished via an external touch-tone phone which plugs into a standard phone jack on the system's front panel. The user simply follows voice instructions given over the phone.

System Controls

System operating status is provided by front panel LED indicators. System off/disarm/ready controls are provided on front panel. Surge protection and noise suppression are standard.

A Truly Modern Autodialer

OMA-GUARDIT fills the requirement of a modern autodialer—it should be extremely reliable and be able to tell the called party as much information about the nature of an alarm as possible so that the right personnel can respond quickly and appropriately. Many other autodialers don't meet these requirements.

OMA-GUARDIT

Specifications

ELECTRICAL

Power Requirements: user supplied 10-14 VDC, 500 mA max.

Power Consumption: 200 mA minimum standby 500 mA maximum active

Power Failure: automatic alarm for external power failure

Battery Charging: precision voltage controlled, automatic rapid recharge after drain

UNIVERSAL SIGNAL INPUTS

Digital Inputs: open contacts see 5VDC, closed contacts see 5 mA DC

Analog Inputs: 4-20 mA, single ended. Maximum voltage drop 10 VDC.

Resolution: 0.2%

Absolute Accuracy: 0.5%

Local Alarm Relay: Transistor output for TTL or relay drive (500 mA 24 VDC max) activated during unacknowledged alarm.

RJ11-Telephone Line Jack: for connection to public telephone network

PHYSICAL

Surge protection: solid state protectors on phone, power, and signal lines

Enclosure: single circuit card in durable steel cabinet designed for mounting on control panel wall or flush mounted inside a larger control panel with faceplate visible

Weight: 4 pounds, 6 pounds with battery

Dimensions: 6.85"H x 8.85"W x 2.85"D

Mounting Centers: 3.6"H x 9"W

ENVIRONMENTAL

Temperature Range: 20° to 130°F.

Humidity: 0 to 95%, non-condensing

TELEPHONE

Rotary pulse or tone dialing. Dials up to 8 different numbers, each up to 60 digits long. Time between alarm phone calls programmable 0.1 to 99.9 minutes. Smart calling call progress monitoring detects dial tone, basic ringback and busy signal. Alarm acknowledgement by touch tone key or callback.

Compatible with most pager, cellular, and voicemail systems. User-furnished standard touch-tone handset required for programming. FCC Registered.

PROGRAMMING

Standard phone jack on front panel for programming phone. Voice menu instructions guide programming.

SPEECH MESSAGES

User digitally records five

messages, Station ID and four channel alarm messages. High definition digital recordings up to 12 seconds per message. Resident synthesized voice vocabulary for programming guidance.

FACTORY OPTIONS

AC Power Supply, battery backup, internal 6 volt; 4 AH gel cell provides 20 hours operation during power failure. NEMA 4X enclosure.

To Order (Specify Model Number)

Model Number	Price	Description
OMA-GUARDIT	\$895	Rugged automatic alarm dialer with 4 analog/digital inputs
OMA-GAC	50	AC power supply
OMA-GBB	65	Battery backup
OMA-GNEMA4X	125	NEMA 4X enclosure

OMA-GUARDIT comes with complete user's manual.

OMEGACARE™ extended warranty is available for models shown on this page. Ask your sales representative for full details when placing order.

Ordering Example: OMA-GUARDIT alarm dialer, OMEGACARE™ 1-year extended warranty (adds 1 year to 2-year standard warranty), \$895 + 79 = **\$974**





UNITED STATES

www.omega.com

1-800-TC-OMEGA
Stamford, CT.

UNITED KINGDOM

www.omega.co.uk

Manchester, England
0800-488-488
+44-(0)161-777-6611

CANADA

www.omega.ca

Laval(Quebec)
1-800-TC-OMEGA

FRANCE

www.omega.fr

0800-466-342

GERMANY

www.omega.de

Deckenpfronn, Germany
0800-8266342

BENELUX

www.omega.nl

0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders, Relative Humidity Measurement Instruments, PT100 Probes, PT100 Elements, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples, Thermowells and Head and Well Assemblies, Transmitters, Thermocouple Wire, RTD Probes

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers, Plug-in Cards, Signal Conditioners, USB, RS232, RS485, Ethernet and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Pressure Transmitters, Strain Gauges, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters