

Portable Temperature Data Logger

Part of the NOMAD® Family OM-TT01

Starts at
\$65



- ✓ Selectable Temperature Range: -40 to 40°C or 0 to 80°C
- ✓ Programmable Alarm Limits with Integral Alarm LED Indicator
- ✓ 2000 Readings
- ✓ 12 Month Battery Life
- ✓ Water Resistant
- ✓ Compact Size
- ✓ Easy to Use
- ✓ Economical

The OM-TT01 is a very low cost single-channel data logger for temperature ranges -40 to 40°C (-40 to 104°F) or 0 to 80°C (32 to 176°F), user selectable via internal jumper. Its compact size makes it ideal for applications requiring multiple loggers for critical temperature monitoring of products.

In addition to a green LED indicating the unit's active status, the logger features programmable alarm limits. If an alarm condition occurs, the red LED will flash, indicating that the logger has experienced temperature conditions outside pre-set parameters.

The stored temperature readings (up to 2000) can be downloaded to a computer through the RS-232 cable interface using the Windows software. Downloaded data can be saved or transferred in a file format compatible with most spreadsheet packages including Excel.

Specifications

Temperature Range:

-40 to 40°C (-40 to 104°F) or 0 to 80°C (32 to 176°F) user selectable by internal jumper

Accuracy: ±0.5°C

Resolution: <0.1°C

Memory: 2000 readings

Sample Rate: 60 sec to 24 hr, software programmable
Red Visual Indicator: Red LED flashes every 4 sec when alarm setpoint is exceeded

Green Visual Indicator: Green LED flashes every 8 sec when logging is active or every 16 sec when memory is full

Start Mode: Immediate start or programmed start delay

Sleep Mode: Logger goes into sleep mode when download is complete

Power: 3 V lithium battery (included)

Battery Life: >1 year typical

Computer Interface: RS-232 serial interface


Software: WIN 98/NT/2000/XP

Enclosure: IP67


Operating Ambient: -40 to 80°C (-40 to 176°F), 5 to 95% RH non-condensing

Dimensions: 42 H x 27 W x 13 mm D (1.65 x 1.06 x 0.51")


Weight: 20 g (0.7 oz)

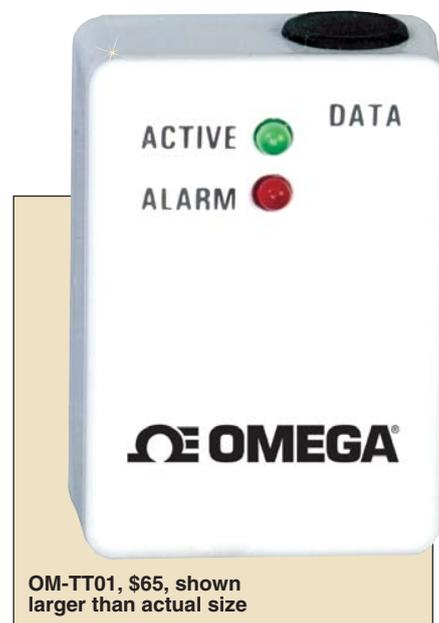


OM-TT01, \$65, shown larger than actual size

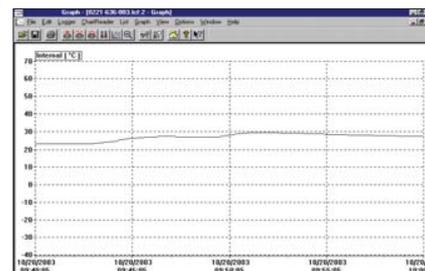

OM-MLWIN software displaying time-based graph of data

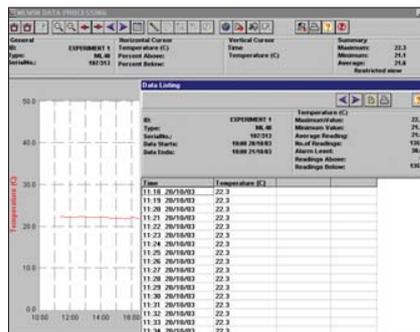

OM-MLWIN software displaying tabular formatted data

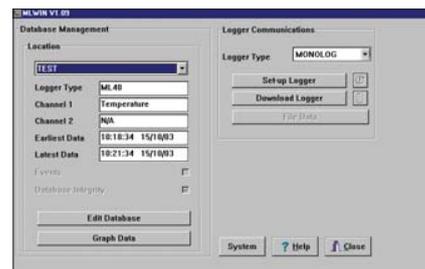

OM-MLWIN software logger configuration screen

AVAILABLE FOR FAST DELIVERY!

To Order (Specify Model Number)		
Model No.	Price	Description
OM-TT01	\$65	Temperature data logger (requires OM-MLWIN Windows software and OM-TTLINK RS-232 cable, see below)
OM-TTLINK	21	1.2 m (4') RS-232 cable with DB9F termination
OM-MLWIN	20	Windows software
OM-TT-BATT	6	Replacement 3 V lithium battery

Each unit comes complete with operator's manual.

Ordering Example: OM-TT01 temperature data logger, OM-MLWIN Windows software and OM-TTLINK 1.2 m (4') RS-232 cable with D89F termination, \$65 + 20 + 15 = \$100.

omega.co.uk®

Your One-Stop Source for Process Measurement and Control!

Freephone 0800 488 488 | International +44(0) 161 777 6622 | Fax +44(0) 161 777 6622 | Sales@omega.co.uk

www.omega.co.uk



UNITED STATES

www.omega.com

1-800-TC-OMEGA

Stamford, CT.

CANADA

www.omega.ca

Laval(Quebec)

1-800-TC-OMEGA

GERMANY

www.omega.de

Deckenpfronn, Germany

0800-8266342

UNITED KINGDOM

www.omega.co.uk

Manchester, England

0800-488-488

FRANCE

www.omega.fr

088-466-342

CZECH REPUBLIC

www.omegaeng.cz

Karviná, Czech Republic

596-311-899

BENELUX

www.omega.nl

0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders, Relative Humidity Measurement Instruments, PT100 Probes, PT100 Elements, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples, Thermowells and Head and Well Assemblies, Transmitters, Thermocouple Wire, RTD Probes

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Pressure Transmitters, Strain Gauges, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters