

PC-BASED SOFT-LOGIC CONTROLLERS



Basic System*
Starts at
\$1195



*Basic system consists of 1 controller, 1 module, and software. See ordering examples on page A-27

ADAM-5510EKW/TCP, \$556,
shown smaller than actual size.

- **Modular I/O Design Provides Optimum Flexibility**
- **Controllers Available with 4 or 8 I/O Modules Slots for up to 128 I/O Points**
- **I/O Modules for Analog Signals, RTDs, Thermocouples, Discrete I/O, Counters and Frequency**
- **RS485 and Ethernet Communications Available**
- **Industrial DIN Rail Mount Design**

The ADAM-5510KW series is designed to monitor and control processes through multi-channel I/O modules. Each system is capable of handling up to 4 or 8 I/O modules for channel capacities up to 128 I/O points. Depending on the type and number of I/O points a system can be configured to meet your optimum application requirements.

Configurable I/O

The ADAM-5000 series analog input modules can be configured to accept several ranges of voltage input, current input, thermocouple input or RTD input. Counter/frequency modules can also be configured to up/down, bi-directional and frequency modes. By storing the configuration in a nonvolatile EEPROM, the system is able to retain set parameters even in the event of a power failure.

3-Way Isolation

Electric noise and transients can enter your system through an I/O module, the power supply connection or a communication connection. The ADAM-5000 series has been designed to effectively prevent noise from all possible sources with:

- 3000 Vdc isolation from ADAM-5000 I/O modules
- Isolation for input signals on communication ports
- Isolation for the communication port's power supply

This 3-way isolation design prevents ground loops and reduces the risk of electric noise affecting your system.

Programmability

The ADAM-5510KW feature 5 standard IEC61131-3 programming languages so PLC users can develop control strategies in their familiar programming languages. The strong MULTIPROG software and stable ProConOS make the ADAM-5510KW the best choice for PC-based Soft-logic controllers in the market.

ProConOS, (Programmable Controller Operating System), has over 250,000+ installations, and is a pre-emptive, multi-tasking run-time software providing deterministic operation down to one millisecond and runs applications developed with MULTIPROG, a fully-featured IEC 61131-3 development environment. Also bundled with the ADAM-5510KW is ProConOS run-time software creating a complete SoftLogic Solution.

RS232/RS485 Modbus Communications

The main unit of ADAM-5510KW contains a 1.5 MB flash memory and 640 KB SRAM which includes battery backup RAM up to 32 KB. In addition, 4 COM ports enrich the communication capacity of ADAM-5510EKW and ADAM-5510KW to integrate with remote I/O or other 3rd party devices based on the Modbus/RTU protocol.

For advanced system integration, the ADAM-5510EKW and ADAM-5510KW are built with a Modbus/RTU Server.

Optional Ethernet

The ADAM-5510EKW/TCP is an Ethernet-enabled SoftLogic Controller. In addition to the features of ADAM-5510KW and ADAM-5510EKW, the ADAM-5510EKW/TCP has Ethernet features including Modbus/TCP Server, Modbus/TCP Client and Multiprog via Ethernet functions. Therefore, users can easily and quickly complete their programming based on Ethernet architecture.

For advanced system integration, the ADAM-5510EKW/TCP supports not only Modbus/RTU Master and Slave functions via serial ports, but also the Modbus/TCP Client to retrieve data from remote I/O, and Modbus/TCP Server to send data back to the HMI/SCADA Software via Ethernet port. Furthermore, the ADAM-5510EKW/TCP allows users to remotely maintain multiple ADAM-5510EKW/TCP controllers by running Multiprog programming software via Ethernet.



ADAM-5510KW, \$445, shown smaller than actual size.

CONTROLLER SPECIFICATIONS

CONTROL SYSTEM

CPU: 16-bit microprocessor
I/O Capacity: 8 slots (5510EKW-A and 5510EKW/TCP); 4 slots (5510KW)
LED Indicators: Power, CPU, communication

MEMORY

Flash Disk: 512 KB
Flash Memory: 768 KB
Flash ROM: 256 KB
RAM: 640 KB SRAM
Operating System: ROM-DOS
Real-Time Clock: Yes
Watchdog Timer: Yes

COMMUNICATIONS

(Ethernet, ADAM-5510EKW/TCP only)
Medium: Cat. 5 cable with RJ-45 connectors
Transmission Speed: 100 Mbps (10/100Base-T)

COMMUNICATIONS

(Serial, All Models)
Max. Nodes: 32 (in RS485 daisy-chain network)
Medium: RS485 (2-wire)
Protocols: Modbus/RTU, Modbus/TCP
Transmission Speed: 9600, 19200 and 38400 bps

PROTECTION

Power Input: 3000 Vdc
Communication Line: 2500 Vdc (COM2 only)

ISOLATION

Power Reversal: Yes

PROTECTION

Power Input: 3000 Vdc
Power Consumption: 4 W @ 24 Vdc (not including I/O modules)
 Unregulated 10 to 30 V
Power Input: Unregulated 10 to 30 Vdc

GENERAL

Certifications: CE, FCC class A (ADAM-5510 and ADAM-5510EKW-A only)
Connectors:
 1 x DB9-M for RS232/485 (COM1)
 1 x Screw terminal for RS485 (COM2)
 1 x DB9-F for RS232/Programming (COM3)
 1 x DB9-M for RS232/485 (COM4)
 1 x Screw-terminal for power input
 1 x RJ-45 for LAN (ADAM-5510EKW/TCP only)

Dimensions:

4-Slot: 231 x 110 x 75 mm
8-Slot: 355 x 110 x 75 mm
Enclosure: ABS + PC
Mounting: DIN 35 rail, stack, wall Environment
Humidity: 5 to 95%, non-condensing
Operating Temperature: -10 to 70° C (14 to 158° F)
Storage Temperature: -25 to 85° C (-13 to 185° F)

To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY

MODEL NO.	PRICE	DESCRIPTION
ADAM-5510KW	\$445	4-slot SoftLogic controller
ADAM-5510EKW	525	8-slot PC-based SoftLogic controller
ADAM-5510EKW/TCP	558	8-slot Ethernet-based SoftLogic controller

Comes with complete user manual on CD

System Ordering Examples

Example 1

Quantity 1 ADAM-5510KW	4-slot softlogic controller	\$445
Quantity 1 ADAM-5051S	16-channel isolated digital input module	99
Quantity 1 ADAM-5080	4-channel counter/frequency module	280
Quantity 1 ADAM-5069	8-channel power relay output module	120
Quantity 1 MPROG-BAS33	KW Multiprog basic development software	555
Quantity 1 PWR-242	Power supply	160
Quantity 1 1703093000	Serial cable	10
	Total	\$1669

Example 2

Quantity 1 ADAM-5510EKW/TCP	8-slot ethernet based softlogic controller	\$555
Quantity 2 ADAM-5018	7-channel thermocouple input module	220 (x2)
Quantity 2 ADAM-5017H	8-channel hi speed analog input module	285 (x2)
Quantity 1 ADAM-5013	3-channel RTD module	250
Quantity 1 ADAM-5024	4-channel analog output module	285
Quantity 1 ADAM-5050	16-channel universal digital I/O module	100
Quantity 1 MPROG-ADV33	KW Multiprog advanced development software	1,110
Quantity 1 1997000220	Blank I/O module	1
Quantity 1 PWR-242	Power supply	160
Quantity 1 1703093000	Serial cable	10
	Total	\$3481

Accessories

MODEL NO.	PRICE	DESCRIPTION
PWR-242	\$160	DIN rail mount power supply, 24vdc, 2.1A
1997000220	1	ADAM-5000 blank I/O module
1703093000	10	RS232 communication cable

INPUT/OUTPUT MODULES SPECIFICATIONS



ADAM-5018, 7-channel thermocouple input \$220, shown smaller than actual size.

ADAM-5018 7-CHANNEL THERMOCOUPLE INPUT MODULE

Certifications: CE, FM

Connectors: 1 x plug-in screw terminal (# 14 to 22 AWG)

Power Consumption: 0.63 W (max)

Thermocouple Input:

Accuracy: $\pm 0.1\%$ or better

Bandwidth: 13.1 Hz @ 50 Hz
15.72 Hz @ 60 Hz

Channels: 7 differential

Input Impedance: 2 M Ω

Input Range: ± 15 mV, ± 50 mV, ± 100 mV, ± 500 mV, ± 1 V, ± 2.5 V, ± 20 mA

Input Type: mV, V, mA, thermocouple

Resolution: 16-bit

Sampling Rate: 10 samples/sec (total)

T/C Type and Temperature Range:

J: 0 to 760° C

K: 0 to 1370° C

T: -100 to 400° C

E: 0 to 1000° C


R: 500 to 1750° C

S: 500 to 1750° C

B: 500 to 1800° C

Protection: Up to ± 35 V

Isolation Voltage: 3000 Vdc

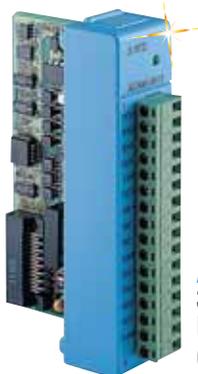

ADAM-5013, 3-channel RTD input, \$250, shown smaller than actual size.

ADAM-5013 3-CHANNEL RTD INPUT MODULE

Certifications: CE

Connectors: 1 x plug-in screw terminal (# 14 to 22 AWG)

Power Consumption: 1.1 W (max)

RTD Input:

Accuracy: $\pm 0.1\%$ or better

Bandwidth: 13.1 Hz @ 50 Hz
15.72 Hz @ 60 Hz

Channels: 3

Input Connections: 2, 3 or 4 wire

Input Impedance: 2 M Ω

Input Type: PT100 or Ni RTD

Resolution: 16-bit

RTD Types and Temperature Ranges:

IEC RTD 100: Ω

Pt -100 to 100° C $\alpha = 0.00385$

Pt 0 to 100° C $\alpha = 0.00385$

Pt 0 to 200° C $\alpha = 0.00385$

Pt 0 to 600° C $\alpha = 0.00385$

JIS RTD 100: Ω

Pt -100 to 100° C $\alpha = 0.00392$

Pt 0 to 100° C $\alpha = 0.00392$

Pt 0 to 200° C $\alpha = 0.00392$

Pt 0 to 600° C $\alpha = 0.00392$

Ni RTD:

Ni -80 to 100° C

Ni 0 to 100° C

Sampling Rate: 10 samples/sec (total)

Isolation Voltage: 3000 Vdc



ADAM-5017, 8-channel analog input, \$205, shown smaller than actual size.

ADAM-5017 8-CHANNEL ANALOG INPUT MODULE

Channels: 8 differential

Effective Resolution: 16-bit

Input Type: mV, V, mA

Input Range: ± 150 mV, ± 500 mV, V, ± 5 V, ± 10 V; ± 20

Sampling Rate: 10 samples/sec (total)

Input Impedance: 2 M Ω

Bandwidth:

13.1 Hz @ 50 Hz,
15.72 Hz @ 60 Hz

Accuracy: $\pm 0.1\%$ or better

Power Consumption: 1 W (typical);
1.25 W (max)

Analog Signal Range: ± 15 V max

Note: The voltage difference between any two pins must not exceed ± 15 V

Isolation Voltage: 3000 Vdc

Protection: Up to ± 35 V



ADAM-5017H, 8-channel high speed analog input, \$285, shown smaller than actual size.

ADAM-5017H 8-CHANNEL HI SPEED ANALOG INPUT MODULE

Channels: 8 differential

Effective Resolution: 12-bit plus sign bit

Input Type: mV, V, mA

Input Range: ± 250 mV, ± 500 mV,

± 1 V, ± 5 V, ± 10 V, 0 to +500 mV,

0 to +1 V, 0 to +5 V, 0 to +10 V,

0 to 20 mA, 4 to 20 mA

Isolation Voltage: 3000 Vdc

Sampling Rate Depends on base unit

ADAM-5510KW: Up to 100 samples/sec

Input Impedance: 20 M Ω (voltage inputs)

125 Ω (current inputs)

Bandwidth: 1 kHz

Signal Input Bandwidth: 1 kHz for both voltage and current inputs

Accuracy: $\pm 0.1\%$ or better; CMR @ 50/60 Hz 92 dB min

Power Consumption: 1.75 W (typical);
2.2 W (max)

Distinct Range: Settings allowed on each channel

Note: The voltage difference between any 2 pins must not exceed ± 15 V

To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
ADAM-5018	\$220	7-channel thermocouple input module
ADAM-5013	250	3-channel RTD input module
ADAM-5017	205	8-channel analog input module
ADAM-5017H	285	8-channel hi speed analog input module



INPUT/OUTPUT MODULES SPECIFICATIONS

ADAM-5024,
4-channel analog
output, \$236,
shown smaller
than actual size.



ADAM-5024 4-CHANNEL ANALOG OUTPUT MODULE

Certifications: CE, FM
Connectors: 1 x Plug-in screw terminal (# 14 to 22 AWG)
Power Consumption: 2.9 W (max)
Analog Output Accuracy: $\pm 0.1\%$ of FSR for current output; $\pm 0.2\%$ of FSR for voltage output
Channels: 4
Current Load Resistor: 0 to 500 (source)
Output: Type mA, V
Output Range: 0 to 20 mA, 4 to 20 mA, 0 to 10 V
Programmable: 0.125 to 128.0 mA/sec
Output Slope: 0.0625 to 64.0 V/sec
Resolution: 12-bit
Resolution: $\pm 0.015\%$ of FSR
Span Temperature: ± 25 PPM/ $^{\circ}$ C
Coefficient:
Zero Drift Voltage: ± 30 μ V/ $^{\circ}$ C
Current: ± 0.2 μ V/ $^{\circ}$ C
Protection:
Isolation Voltage: 3000 Vdc



ADAM-5050,
\$100, shown smaller
than actual size.

ADAM-5050 16-CHANNEL UNIVERSAL DIGITAL I/O MODULE

Certifications: CE, FM
Connectors: 1 x Plug-in screw terminal (# 14 to 22 AWG)
Power Consumption: 1.2 W (max)
Digital I/O Channels: 16
Channel I/O Type: Bit-wise selectable by DIP switch Digital Input
Dry Contact:
Logic Level 0: Close to GND
Logic level 1: Open

Wet Contact:
Logic level 0: 2 V max
Logic level 1: 4 to 30 V
Digital Output: Open collector to 30 V, 100 mA and 450 mW max load
Power Dissipation: 300 mW for each channel



ADAM-5051S,
16-channel isolated
digital input module,
\$99, shown smaller
than actual size.

ADAM-5051S 16-CHANNEL ISOLATED DIGITAL INPUT MODULE (ROHS)

Certifications: CE
Connectors: 1 x Plug-in screw terminal (# 14 to 28 AWG)
LED Indicators:
On: Active
Off: Inactive
Power Consumption: 0.8 W (max)

Digital Input Channels: 16
Input Voltage: 50 Vmax
Logic Level:
Logic level 0: 3 V max
Logic level 1: 10 to 50 V
Protection:
Optical Isolation: 2500 Vdc
Overvoltage Protection: 70 Vdc



ADAM-5052,
8-channel isolated
digital input module,
\$85, shown smaller
than actual size.

ADAM-5052 8-CHANNEL ISOLATED DIGITAL INPUT MODULE (ROHS)

Certifications: CE, FM
Connectors: 1 x Plug-in screw terminal (# 14 to 22 AWG)
Power Consumption: 0.27 W (max)
Digital Input Channels: 8
Input Resistance: 3 K Ω /0.5 W
Logic Level:
Logic level 0: 1 Vmax
Logic level 1: 3.5 to 30 V
Protection:
Isolation Voltage: 5000 VRMS

To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
ADAM-5024	\$285	4-channel analog output module
ADAM-5050	100	16-channel universal digital I/O module
ADAM-5051S	99	16-channel isolated digital input module (RoHS)
ADAM-5052	85	8-channel isolated digital input module (RoHS)

INPUT/OUTPUT MODULES SPECIFICATIONS



ADAM-5060, \$95, shown smaller than actual size.



Contact Rating:
AC: 250 V @ 5 A
DC: 30 V @ 5 A
Insulation Resistance: 1 GΩ @ 500 Vdc
Relay On Time: 5 ms
Relay Off Time: 5.6 ms

ADAM-5060 6 CHANNEL RELAY OUTPUT MODULE (ROHS)

Certifications: CE; FM (ADAM-5060 only)
Connectors: 1 x plug-in screw terminal (# 14 to 22 AWG)
Power Consumption: 1.8 W (max)
Relay Output:
Breakdown Voltage: 500 Vac (50/60 Hz)

Channels: 2 x form A, 4 x form C

Contact Rating:

AC: 125 V @ 0.6 A; 250 V @ 0.3 A
DC: 30 V @ 2 A; 110 V @ 0.6 A

Insulation Resistance: 1 GΩ min @ 500 Vdc

Relay Off Time: (typical) 2 ms

Relay On Time: (typical) 3 ms

Total Switching Time: 10 ms



ADAM-5056S, \$115, shown smaller than actual size.

ADAM-5056SO/S 16-CHANNEL SOURCE/SINK TYPE ISOLATED DIGITAL OUTPUT MODULE (ROHS)

Certifications: CE
Connectors: 1 x plug-in screw terminal (# 14 to 28 AWG)
LED Indicator:
On: Active
Off: Inactive

Power Consumption: 0.6 W (max)

Digital Output

Channels: 16

Digital Output: Open collector to 40V, 200 mA max load

ADAM-5056SO-AE: Source output

ADAM-5056S-AE: Sink output

Optical Isolation: 2500 Vdc

Overvoltage Protection: 70 Vdc

ADAM-5080 4-CHANNEL COUNTER/ FREQUENCY MODULE

Certifications: CE, FM
Connectors: 1 x plug-in screw terminal (# 14 to 22 AWG)

Power Consumption: 1.5 W (max)
 Counter/Frequency

Counter Aux. Function: Initial preset, hi-low alarm setting, alarm, digital output mapping, overflag

Channels: 4

Input Frequency: 0.3 to 1000 Hz max (frequency mode); 5000 Hz max (counter mode) TTL only

Input Level: Isolated or TTL level

Isolation Input Level:

Logic Level 0: 1 Vmax

Logic Level 1: 3.5 to 30 V

Isolation Voltage: 1000 VRMS

Maximum Count: 4, 294, 967, 295 (32 bits)

Minimum Input Current: 2 mA (isolated)



ADAM-5080, 4-channel counter/frequency module, \$280, shown smaller than actual size.

Minimum Pulse Width: 500 ms (frequency mode); 100 ms (counter mode)

Modes Counter: (up/down, bi-direction) frequency

Programmable Digital Filter: 1 to 65000 μsec (noise filter function)

TTL Input Level:

Logic level 0: 0 to 0.8 V

Logic level 1: 2.3 to 5 V



ADAM-5069, \$145, shown smaller than actual size.

ADAM-5069-AE 8 CHANNEL POWER RELAY OUTPUT MODULE (ROHS)

Certifications: CE, FCC class A
Connectors: 1 x plug-in screw terminal (# 14 to 22 AWG)

LED Indicator:

On: Active

Off: Non-active

Power Consumption: 2.2 W (max)

Relay Output:

Breakdown Voltage: 750 Vac (50/60 Hz)

Channels: 8 x form A

To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
ADAM-5056SO	\$115	16-channel source/sink type isolated digital output module (RoHS)
ADAM-5056S	115	16-channel sink type isolated digital output module (RoHS)
ADAM-5060	95	6-Channel relay output module (RoHS)
ADAM-5069	145	8-Channel power relay output module (RoHS)
ADAM-5080	280	4-channel counter/frequency module (RoHS)



KW MULTIPROG®


IEC-61131-3 DEVELOPMENT SOFTWARE FOR THE ADAM 5510

Starts at
\$555

- IEC 61131-3 Programming Languages
- Intuitive Programming With a Clear Project Structure
- Cross-Compiling: FBD, LD and IL Can be Cross-Compiled to Each Other
- Multi User Functionality Shortens Programming Time
- Management of Distributed Controls
- Network Variables: Easy and Powerful Configuration of Distributed Communication
- Powerful Debugging Tools: Online Changes, PLC Simulation, Overwriting and Forcing, Breakpoints, Watch Windows and Recipes, Logic Analyzer, and Cross Reference

Introduction

MULTIPROG® is a program development environment for the AD5510 series programmable automation controllers. MULTIPROG® supports all IEC 61131-3 programming languages. Depending on the task to be handled, your experience and company standards, you may choose one of the five standardized programming languages. The use of MULTIPROG® offers you many advantages. Our long-term experience in the automation industry guarantees you a sophisticated software product. The open architecture of MULTIPROG® provides a new direction in the creation of automation software. MULTIPROG® Automation Interface guarantees consistent data. Via the automation interface, MULTIPROG® opens its data for other tools. MULTIPROG® allows

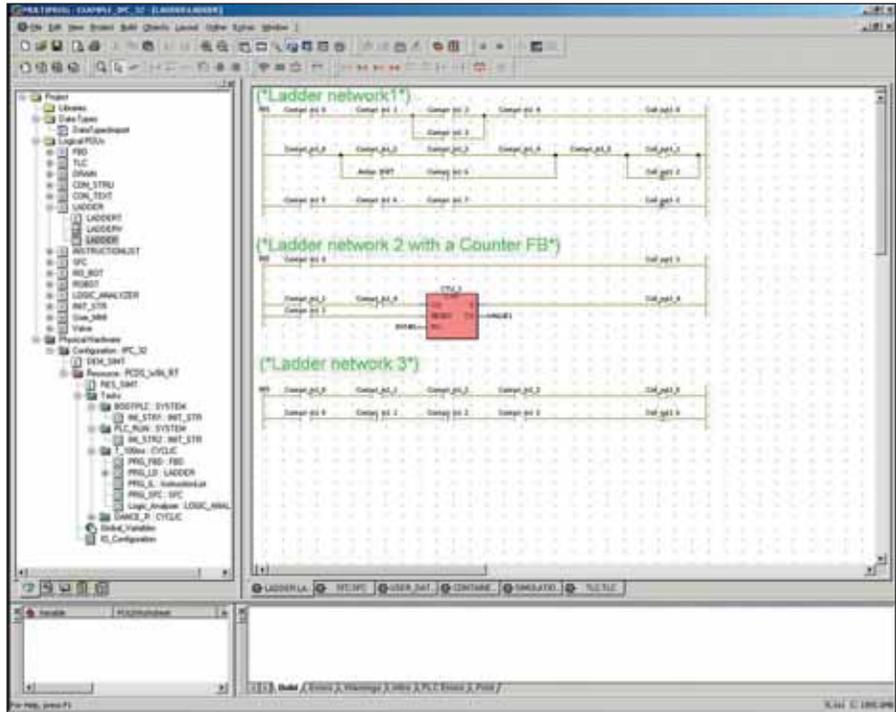

KW Multiprog development environment.

Minimum System Requirements

DEVICE	MINIMUM	RECOMMENDED
IBM compatible PC with Pentium Processor	200 MHz	350 MHz
System RAM	64 MB	128 MB
Hard Disk	60 MB free memory space	
VGA Monitor Color Settings Resolution	256 colors 800 x 600	True color 1024 x 768

To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
MPROG-ADV33	\$1110	KW Multiprog Advanced Development Software (unlimited I/O)
MPROG-BAS33	555	KW Multiprog Basic Development Software (128 byte I/O limitation*)

* When calculating I/O count, 1 byte is used for every 8 channels of discrete I/O and 4 bytes are used for every 1 analog channel.

external creation and modification of its project data. Furthermore, specific attributes can be added. As all essential data can be displayed in MULTIPROG®, frequent switching between different tools during PLC programming and commissioning is no longer necessary. Observers guarantee data consistency with other tools, thus the engineering effort for the programming of PLCs is reduced.

IEC 61131-3 Programming Languages (all supported)

- Instruction List (IL)
 - Structured Text (ST)
 - Function Block Diagram (FBD)
 - Ladder Diagram (LD)
 - Sequential Function Chart (SFC)
- All programming languages can be mixed within one project



UNITED STATES

www.omega.com
1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca
Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de
Deckenpfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk
Manchester, England
0800-488-488

FRANCE

www.omega.fr
Guyancourt, France
088-466-342

CZECH REPUBLIC

www.omegaeng.cz
Karviná, Czech Republic
596-311-899

BENELUX

www.omega.nl
Amstelveen, NL
0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters