



OM-40 Series Portable Low Cost Dataloggers Part of the NOMAD® Family



- ✓ Measure and Record Temperature, Relative Humidity, DC Voltage or DC Current Input
- ✓ Stores up to 7943 Readings
- ✓ Compact Size
- ✓ Easy-to-Use Windows Software

OM-40 Series dataloggers can record temperature, relative humidity, 4 to 20 mA and 0 to 2.5 Vdc signals. Model OM-41 measures temperature only (internal temperature sensor). Model OM-42 is a two channel datalogger that measures temperature (internal sensor) and also one external signal which can be an external temperature probe, 4 to 20 mA signal or 0 to 2.5 Vdc signal. Model OM-43 measures temperature and relative humidity (internal sensors). Model OM-44 is a four channel datalogger that measures temperature and relative humidity (internal sensors) and also up to two external signals which can be external temperature probes, 4 to 20 mA signals or 0 to 2.5 Vdc signals. The internal temperature sensor is on a 10.6 cm (4") wire which is mounted on the circuit board inside the snap lid of the datalogger case. Typically this sensor is left inside the case and measures ambient air temperature over the operating temperature range of the logger -20 to 70°C (-4 to 158°F). The internal temperature sensor can also be placed outside of the case, for faster response time. When the sensor is placed outside of the case it is capable of measuring temperatures from -40 to 120°C (-40 to 248°F).



OM-41 datalogger, £43.50, shown larger than actual size

Specifications

GENERAL

Measurement Capacity:

7943 readings

Measurement Interval: User selectable from 0.5 sec to 9 hrs

Memory Modes: Stop when full, wrap-around when full (user selectable)

Memory: Non-volatile EEPROM memory retains data even if battery fails

Operation: Blinking LED light confirms operation

Time Accuracy: ±1 minute per week at 20°C (68°F)

Operating Temperature:

-20 to 70°C (-4 to 158°F)

Operating Humidity:

0 to 95% non-condensing

Storage Temperature:

-20 to 70°C (-4 to 158°F)

Power: 3.0 V lithium battery (included)

Battery Life: 1 year

Dimensions:

68 H x 48 W x 19 mm D

(2.4 x 1.9 x 0.8")


Weight: 29 g (1 oz)

Measurement Specifications Temperature (internal sensor) - All Models

Measurement Range: Sensor inside case, -20 to 70°C (-4 to 158°F); sensor outside case, -40 to 120°C (-40 to 248°F)

Sensor Type: Thermistor

Accuracy: ±0.7°C@21°C (±1.27°F @ 70°F) (see plot)

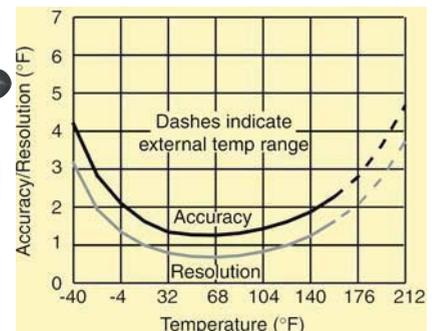

Temperature Measurement Accuracy/Resolution

Resolution:


0.4°C (0.7°F) at 70°F

Response Time (Still Air):

15 min typical with sensor inside case; 1 min typical with sensor outside case

Relative Humidity (user-replaceable internal sensor) Models OM-43 and OM-44

Measurement Range: 25% to 95% RH at 80°F for intervals of 10 seconds or greater, non-condensing and non-fogging (see plot)

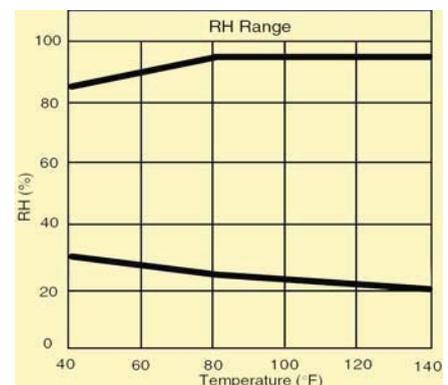


Relative Humidity Measurement Range vs. Temperature



Sensor Type: Resistive
Accuracy: $\pm 5\%$
 5 to 50°C (41 to 122°F)
Resolution: 0.4%
 5 to 50°C (41 to 122°F)
Response Time:
 10 min typical in air

External Temperature Sensors (for use with Models OM-42 and OM-44) Measurement Range:
OM-40-C-LT (for use in air):
 0 to 44°C (32 to 110°F)
 (The **OM-40-C-LT** is designed for use in air and is not recommended for moist or wet environments)
OM-40-C-HT-B (for use in water or soil): -40 to 50°C (-40 to 122°F)
OM-40-C-HT-B (for use in air):
 -40 to 100°C (-40 to 212°F)

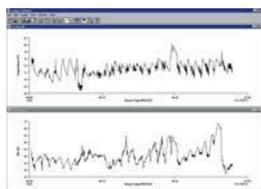


Windows Software-Data Plot

Sensor Type: Thermistor
Input Connection:
 2.5 mm stereo phone jack
External 4 to 20 mA Input (for use with Models OM-42 and OM-44) Measurement Range:
 0 to 20.1 mA

Input Connection:
 2.5 mm stereo phone jack
Accuracy: ± 0.1 mA $\pm 1\%$ rdg
Resolution: 0.4% of fs

External 0 to 2.5 Vdc Input (for use with Models OM-42 and OM-44) Measurement Range: 0 to 2.5 Vdc

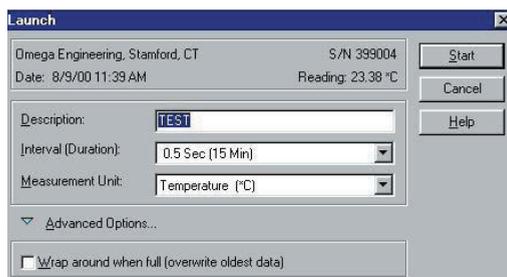

Windows Software-Datalogger Setup

Input Connection: 2.5 mm stereo phone jack; external input ground, input, switched 2.5 V output; external input ground connection is not the same as PC interface connection ground and should not be connected to any external ground
Input Impedance: 10 kOhm
Accuracy: ± 10 mV $\pm 1\%$ rdg
Resolution: 10 mV (8-bit)
Output Power: 2.5 Vdc at 2 mA, active only during measurements



OM-44 datalogger, £70, shown smaller than actual size



OM-43, £62, datalogger smaller than actual size

MOST POPULAR MODELS HIGHLIGHTED

To Order (Specify Model Number)		
Model No.	Price	Description
OM-41	£43.50	Temperature datalogger
OM-42	48.00	Temperature/external input datalogger (takes one external input)
OM-43	62	Temperature/relative humidity datalogger
OM-44	70	Temperature/relative humidity/external input datalogger (takes up to two external inputs)
OM-40-C-LT	27	External temperature sensor for use with Models OM-42 and OM-44 (low temperature range, high accuracy for use in air) 1.8 m (6') cable
OM-40-C-HT-B	22.75	External temperature sensor for use with Models OM-42 and OM-44 (high temperature range, for use in air or water) 1.8 m (6') cable
OM-40-C-V	7.40	External 0 to 2.5 Vdc voltage input cable for use with Models OM-42 and OM-44
OM-40-C-I	12.75	External 4 to 20 mA input cable for use with Models OM-42 and OM-44
RD-TEMP-SW-A	37.00	Windows 95/98/NT/2000/XP software and RS-232 interface cable with DB9F termination for OM-40 Series dataloggers
OM-40-BATT	10	Replacement 3.0 V lithium battery for OM-40 Series dataloggers (package of 10)
CS-3783	33.50	Reference Books: Digital Signal Processing & Applications

Dataloggers are supplied with complete operator's manual and mounting kit (hook/loop, magnet and tape).
Ordering Example: OM-44 datalogger, OM-40-C-LT external temperature sensor, OM-40-C-V voltage input cable, and RD-TEMP-SW-A Windows software, £70 + 27 + 5.40 + 7.40 = £102.40



UNITED STATES

www.omega.com

1-800-TC-OMEGA

Stamford, CT.

CANADA

www.omega.ca

Laval(Quebec)

1-800-TC-OMEGA

GERMANY

www.omega.de

Deckenpfronn, Germany

0800-8266342

UNITED KINGDOM

www.omega.co.uk

Manchester, England

0800-488-488

FRANCE

www.omega.fr

088-466-342

CZECH REPUBLIC

www.omegaeng.cz

Karviná, Czech Republic

596-311-899

BENELUX

www.omega.nl

0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders, Relative Humidity Measurement Instruments, PT100 Probes, PT100 Elements, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples, Thermowells and Head and Well Assemblies, Transmitters, Thermocouple Wire, RTD Probes

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Pressure Transmitters, Strain Gauges, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters