


OMB-DBK7

4-Channel Frequency-Input Card for OMB-DAQBOARD-2000 Series and OMB-LOGBOOK

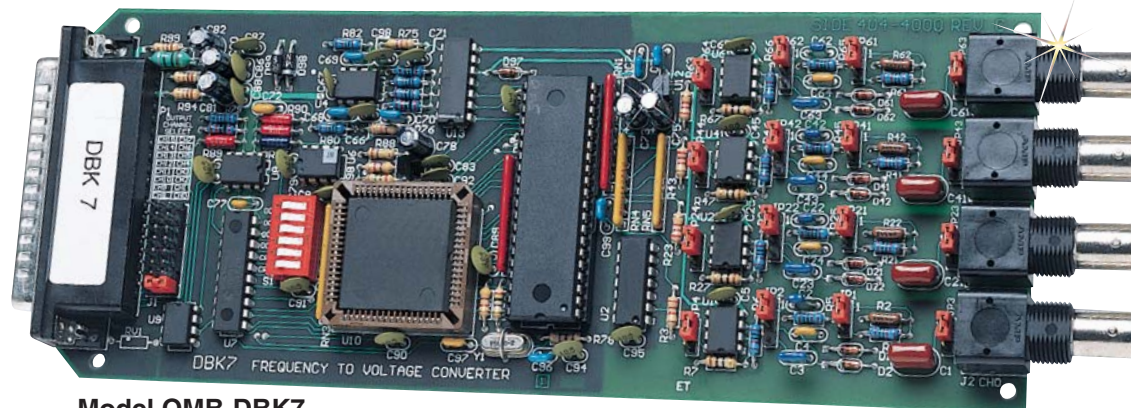

OMB-DBK7, 749, frequency-input card, shown smaller than actual size

Model OMB-DBK7

\$749

- ✓ Programmable from 1 Hz to 950 kHz Per Channel
- ✓ Frequency Resolution to 0.00025 Hz
- ✓ Provides Per-Channel, User-Configurable Low-Pass Filters

The OMB-DBK7 frequency-input card provides OMB-LOGBOOK and OMB-DAQBOARD-2000 Series data acquisition systems with four channels of frequency-measurement capability. The card measures the input signal's frequency and converts the frequency to a voltage, which can then be measured by the data acquisition system. The OMB-DBK7's output is read by the data acquisition system along with any other analog channels included in the analog scan group, allowing easy correlation of readings from the OMB-DBK7 with other test parameters. As many as sixty-four OMB-DBK7's can be connected to one OMB-LOGBOOK and OMB-DAQBOARD-2000 series acquisition system, for a total of up to 256 channels.

Analog Inputs

The OMB-DBK7 accepts AC-coupled analog inputs up to 80 V p-p. Each of its channels is equipped with a low-pass input filter that is jumper selectable for 100 kHz, 300 Hz, or 30 Hz.

The card can accommodate 1 Hz to 100 kHz measurement of signals from 50 mV to 80 V p-p.

Digital Inputs

The OMB-DBK7's digital inputs, which can measure signals from 0.001 Hz to 950 kHz, feature TTL Schmitt-trigger levels and can accept DC-coupled signals from -15 V to +15 V. The OMB-DBK7's digital inputs are equipped with pull-up resistors for use with relays or switches.

Frequency Range

The OMB-DBK7 provides 12-bit resolution at any frequency from 1 Hz to 950 kHz.

Update Rates

For ranges from 1 Hz to the user-defined maximum upper range boundary, the voltage conversion update will occur every 2 to 4 ms or the period of the input frequency, whichever is greater. With a range of 0 to 10 kHz, the OMB-DBK7 will update every 2 to 4 ms. If the range is 0 to 60 Hz, the output will update every cycle or 16.6 ms.

Specifications

Connector: DB37 male, mates with P1 connector on the OMB-LOGBOOK and OMB-DAQBOARD-2000 Series; BNC connectors for signal inputs

Number of Channels per Card: 4

Maximum Cards per System: 64

Frequency-to-Voltage Ranges:

Programmable from 1 Hz to 950 kHz

Accuracy: 0.1%

Low-Pass Filters: 300 Hz & 30 Hz

Debouncing: off 0.6, 2.5, & 10 ms

Input Characteristics

Low-Level Analog Signals

Minimum: 100 mV guaranteed

Maximum: 80 V p-p sine wave

Minimum Slew: 5 V/s

Hysteresis: 15 mV

Impedance: AC-coupled (0.33 μ F), in series with 20 K Ω to ground

High-Level Analog Signals

Minimum: 1.25 V guaranteed

Maximum: 80 V p-p sine wave

Minimum Slew: 50 V/s

Hysteresis: 250 mV

Impedance: AC-coupled (0.33 μ F), in series with 20 K Ω to ground

Digital Signals

Input Voltage: -15 V to +15 V

Threshold Voltage (low):

0.8 V typ, 0.5 V min

Threshold Voltage (high):

1.6 V typ, 2.1 V max

Hysteresis: 400 mV min

Pulse Width: 520 ns min

Input Impedance: 27 K Ω pull-up to +5 V in parallel with 50 pF

Power Consumption: 420 mW

AVAILABLE FOR FAST DELIVERY!

To Order (Specify Model Number)		
Model Number	Price	Description
OMB-DBK7	\$749	4-Channel Frequency-Input Card

Ordering Example: OMB-DBK7 4-channel frequency-input card, \$749.

omega.co.uk[®]

Your One-Stop Source for Process Measurement and Control!

Freephone 0800 488 488 | International +44(0) 161 777 6622 | Fax +44(0) 161 777 6622 | Sales@omega.co.uk

www.omega.co.uk



UNITED STATES

www.omega.com

1-800-TC-OMEGA
Stamford, CT.

UNITED KINGDOM

www.omega.co.uk

Manchester, England
0800-488-488
+44-(0)161-777-6611

CANADA

www.omega.ca

Laval(Quebec)
1-800-TC-OMEGA

FRANCE

www.omega.fr

0800-466-342

GERMANY

www.omega.de

Deckenfronn, Germany
0800-8266342

BENELUX

www.omega.nl

0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders, Relative Humidity Measurement Instruments, PT100 Probes, PT100 Elements, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples, Thermowells and Head and Well Assemblies, Transmitters, Thermocouple Wire, RTD Probes

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485, Ethernet and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Pressure Transmitters, Strain Gauges, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters