


# PCI-PDISO8 and PCI-PDISO16

## 8- and 16-Channel High Voltage, High Current Digital I/O Boards for the PCI Bus

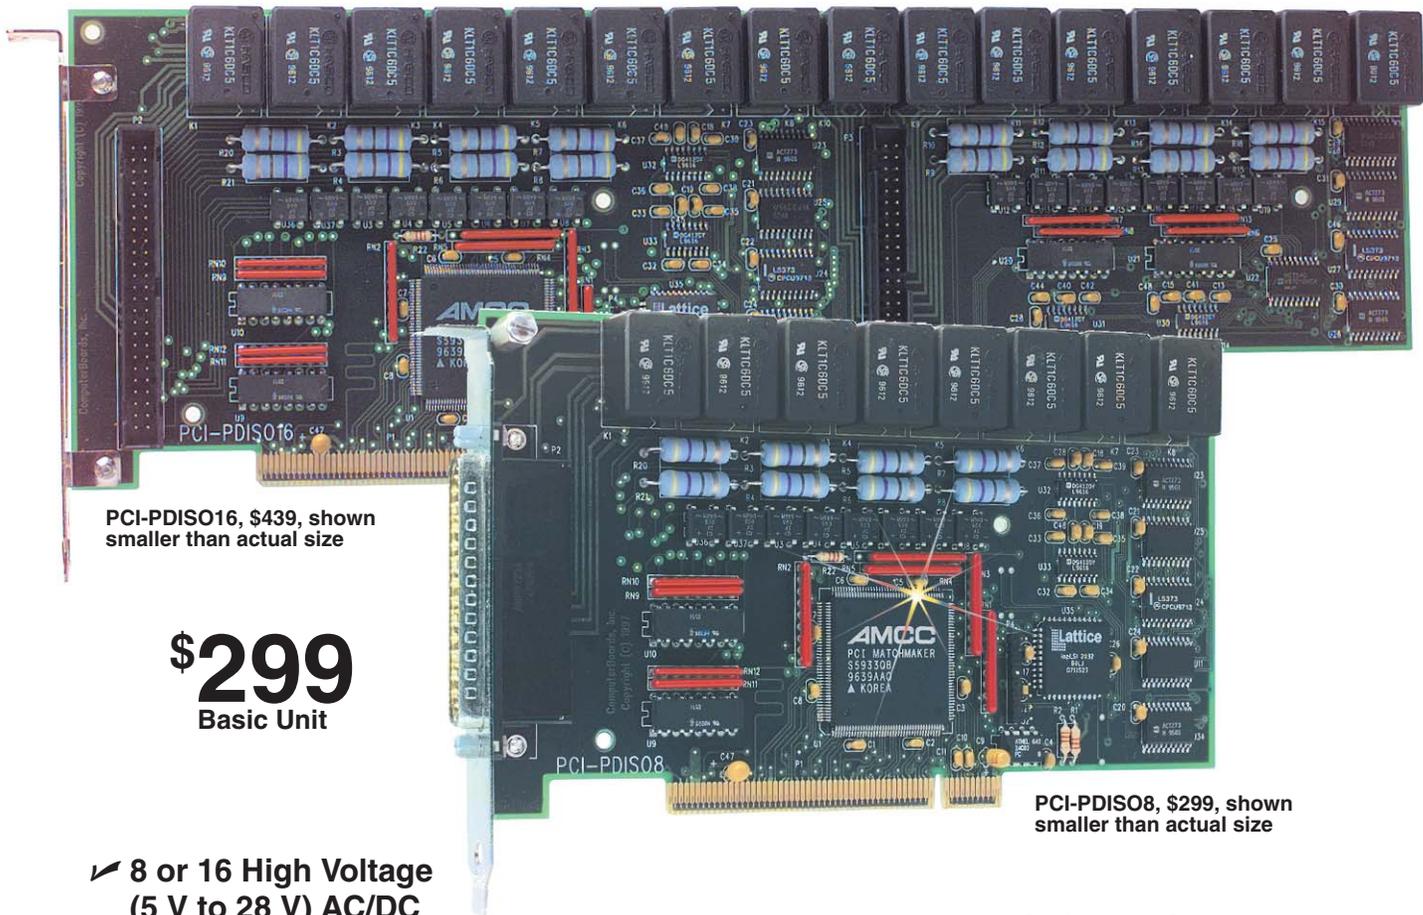

PCI-PDISO16, \$439, shown smaller than actual size

**\$299**  
Basic Unit

PCI-PDISO8, \$299, shown smaller than actual size

- 8 or 16 High Voltage (5 V to 28 V) AC/DC Digital Input Channels
- 3 Amp, 120 Vac Relay Output Control
- Fully Plug-and-Play

The PCI-PDISO16 and PCI-PDISO8 combine isolated AC or DC inputs and electromechanical relays on a single PCI-bus compatible board, for IBM or compatible PC's. The PCI-PDISO16 provides sixteen 24 V AC or DC inputs and sixteen form C, 3-Amp relays.

The PCI-PDISO8 offer eight 24 V AC or DC and eight 3-Amp relay outputs (five form C, three form A). A software enabled input filter is available on all channels.

The boards are fully connector compatible with their ISA counterparts (CIO-PDISO16 and CIO-PDISO8). Both boards are also completely plug-and-play. There are no switches or jumpers on the board. All board addresses, interrupt channels, etc., are set by your computer's plug-and-play software.

### Screw Terminal Boards

The PCI-PDISO16 board is compatible with the CIO-MINI50 via the C50FF-2 cable, while the PCI-PDISO8 is compatible with the CIO-MINI37 via a C37FF-2 cable. OMEGA cautions against the use of screw terminal boards in high voltage applications unless specific and professionally designed precautions are taken to avoid the possibility of accidental contact with hazardous high voltage signals.

### Software Support

The PCI-PDISO series is supplied with InstaCal software for configuration and testing. It is also supported by the optional Universal Library. The Universal Library is a set of I/O libraries and drivers for users creating their own custom programs.

The Universal Library is compatible with most DOS and Windows (16-bit and 32-bit) based languages (DLL and VXD) and supports the entire CIO family of boards. The Library includes an extensive set of programming examples written in Visual Basic, C and Pascal for DOS, Windows 3.1, Windows 95 and Windows NT. An optional driver for LabVIEW is also available.



## Specifications

### RELAY OUTPUTS

**Contact Configuration:**

**PCI-PDISO16:** 16 form C

**PCI-PDISO16:** 5 form C,  
3 form A (NO)

**Contact Rating:** 3 A @ 120 Vac  
or 28 Vdc resistive

**Contact Type:** Gold overlay silver

**Contact Resistance:** 100  
milliohms max

**Operate Time:** 20 milliseconds

**Release Time:** 10 milliseconds  
max

**Vibration:** 10 to 55 Hz  
(Dual amplitude 1.5 mm)

**Dielectric Isolation:** 500 V  
(1 minute)

**Life Expectancy:** 10 million  
mechanical operations, min

### ISOLATED INPUTS

**PCI-PDISO16:** 16

**PCI-PDISO8:** 8

**DC input ranges:**  $V_{in}$  low,  
1.8 V, max;  $V_{in}$  high, 5 V, min

**AC input ranges (50 to 1000 Hz):**  
 $V_{in}$  low, 1.8 V<sub>p-p</sub>, max;  $V_{in}$  high,  
5.0 V<sub>p-p</sub>, min

**Max input voltage:** 28 Vdc  
or 28 VRMS (50 to 1000 Hz)

**Isolation:** 500 V

**Resistance:** 1.6 K $\Omega$  min

**Response w/o filter:** 20  $\mu$ s  
(without filter), 5 ms (with filter)

**Filter Control:** Individually  
programmable, filters disabled  
on power-up/reset

### POWER CONSUMPTION (+5 V)

**PCI-PDISO16:** 0.7 A, all relays  
OFF, 2.0 A, all relays ON


**PCI-PDISO8:** 0.4 A, all relays OFF,  
1.0 A, all relays ON

### ENVIRONMENTAL


**Operating temperature:**  
0 to 50°C (32 to 122°F)

**Storage temperature:**  
-20 to 70°C (-4 to 158°F)


**Humidity:** 0 to 90%  
non-condensing




**CIO-MINI50, \$69, terminal panel  
show smaller than actual size**



**CIO-MINI37, \$69, terminal panel  
show smaller than actual size**

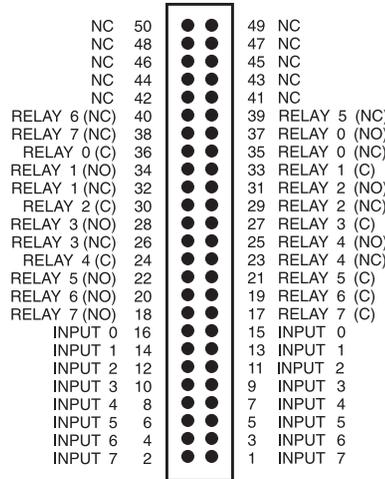

**PCI-PDISO16 50-Pin Connector**

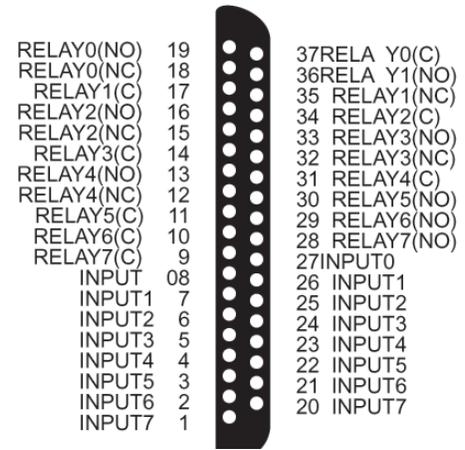

**PCI-PDISO8 37-Pin Connector**

**AVAILABLE FOR FAST DELIVERY!**

### To Order (Specify Model Number)

Model Number	Price	Description
<b>PCI-PDISO16</b>	<b>\$439</b>	16-channel PCI-bus compatible high voltage (AC or DC) input board with 16 electromechanical relays
<b>PCI-PDISO8</b>	<b>299</b>	8-channel PCI-bus compatible high voltage (AC or DC) input board with 8 electromechanical relays
<b>CIO-MINI50</b>	<b>69</b>	50-pin screw terminal board (for PCI-PDISO16)
<b>C50FF-2</b>	<b>25</b>	50-pin ribbon cable, 0.6 m (2') long (for PCI-PDISO16)
<b>CIO-MINI37</b>	<b>69</b>	37-pin screw terminal board (for PCI-PDISO8)
<b>C37FF-2</b>	<b>25</b>	37-pin ribbon cable, 0.6 m (2') long (for PCI-PDISO8)
<b>UNIV-DRVR</b>	<b>49</b>	Universal Software Library (DOS, Windows 3.1, Windows 95, Windows 98 and Windows NT)
<b>CIO-LABVIEW-DRVR</b>	<b>49</b>	LabVIEW driver

The PCI-PDISO series comes with InstaCal testing software and complete operator's manual OMEGACARE<sup>SM</sup> extended warranty is available for models shown on this page. Ask your sales representative for full details when placing orders.

**Ordering Example:** PCI-PDISO16 card, CIO-MINI50 screw terminal panel, C50FF-2 cable, OMEGACARE<sup>SM</sup> 1-year extended warranty for PCI-PDISO16 (adds 1 year to standard 3-year warranty) and UNIV-DRVR Universal Software Library, \$439 + 69 + 25 + 35 + 49 = **\$617**.

# omega.co.uk<sup>®</sup>

Your One-Stop Source for Process Measurement and Control!

Freephone 0800 488 488 | International +44(0) 161 777 6622 | Fax +44(0) 161 777 6622 | Sales@omega.co.uk

[www.omega.co.uk](http://www.omega.co.uk)



#### UNITED STATES

[www.omega.com](http://www.omega.com)

1-800-TC-OMEGA  
Stamford, CT.

#### UNITED KINGDOM

[www.omega.co.uk](http://www.omega.co.uk)

Manchester, England  
0800-488-488  
+44-(0)161-777-6611

#### CANADA

[www.omega.ca](http://www.omega.ca)

Laval(Quebec)  
1-800-TC-OMEGA

#### FRANCE

[www.omega.fr](http://www.omega.fr)

0800-466-342

#### GERMANY

[www.omega.de](http://www.omega.de)

Deckenfronn, Germany  
0800-8266342

#### BENELUX

[www.omega.nl](http://www.omega.nl)

0800-099-33-44



## More than 100,000 Products Available!

### • Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders, Relative Humidity Measurement Instruments, PT100 Probes, PT100 Elements, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples, Thermowells and Head and Well Assemblies, Transmitters, Thermocouple Wire, RTD Probes

### • Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

### • pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

### • Data Acquisition

Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485, Ethernet and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

### • Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Pressure Transmitters, Strain Gauges, Torque Transducers, Valves

### • Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters